

## User's Instruction


### Product Descriptions

The B-Box 6 is a 6 channel DMX booster with one DMX input and 6 DMX outputs. This unit takes the incoming DMX signal and splits the signal into six separate output channels. Each output channel and the input channel are completely electronically isolated from each other, all six output channels have independent output drivers to boost the DMX signal. In addition, a Link out/Terminate selector is used for secure linking when you intend to terminate DMX signal.

### Technical specifications

<b>Power Input</b> .....	AC 230V~50Hz, 0.5A
<b>DMX Connectors</b> .....	3-pin and 5-pin XLR sockets
<b>Fuse</b> .....	F0.5A 250V 5x20mm
<b>Dimensions</b> .....	482x135x42mm
<b>Weight</b> .....	2.25Kg

### Controls and Functions

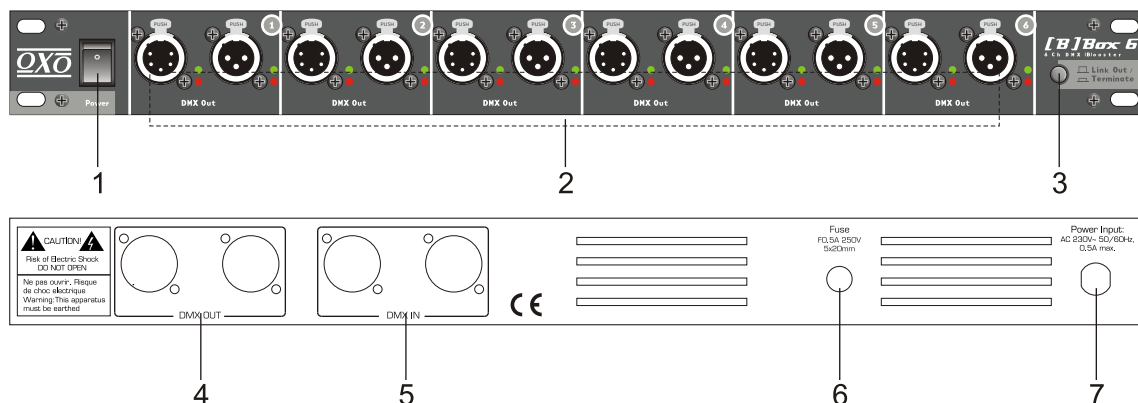

- 1. Power Switch** - This switch turns on and off the main power.
- 2. DMX Output/ W Driver** - The six DMX output channels are completely electronically isolated and each features an independent driver that boost the DMX signal.
- 3. Link Out / Terminate selector** - This switch is primarily meant for troubleshooting. When the switch is in the "Terminate" position, DMX output(4) is turned off and you can not link any more units. When the switch in the "Link Out" position, this unit allows you link a second unit.
- 4. DMX Output** - These jacks are used for linking a second unit.
- 5. DMX Input** - These jacks are used to receive an incoming DMX signal.
- 6. Fuse** - F0.5A 250V 5x20mm
- 7. Power Input** - AC 230V~50Hz, 0.5A Max.

### **WARNING!!!**

1. This apparatus must be earthed.
2. To prevent fire or shock hazard, do not expose this product under a high temperature or humid area.
3. This product is intended for indoor use only.
4. Replace the fuse with the same type.

